

EMC TEST REPORT  
For  
QUAWINTEC TECHNOLOGY CO., LIMITED  
Multi-function charger  
Test Model: QW050-020-4NL

Prepared for : QUAWINTEC TECHNOLOGY CO., LIMITED  
Address : 3rd Floor, Building C, Building 1, Aike Industrial Park,  
Baoan 23 District, Shenzhen

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : Room 101, 201, Building A and Room 301, Building C,  
Juji Industrial Park, Yabianxueziwei, Shajing Street,  
Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 14, 2021  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : April 14, 2021 ~ April 20, 2021  
Date of Report : April 21, 2021



**EMC TEST REPORT**

**EN 55014-1: 2017**

Requirements for household appliances, electric tools and similar apparatus -- Part 1:  
Emission

**EN 55014-2: 2015**

Requirements for household appliances, electric tools and similar apparatus -- Part 2:  
Immunity - Product family standard

**Report Reference No. ....: LCS210413053AE**

Date Of Issue .....: April 21, 2021

**Testing Laboratory Name ....: Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address.....: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure ..: Full application of Harmonised standards ■  
Partial application of Harmonised standards □  
Other standard testing method □

**Applicant's Name .....: QUAWINTEC TECHNOLOGY CO., LIMITED**

Address.....: 3rd Floor, Building C, Building 1, Aike Industrial Park, Baoan 23 District, Shenzhen

**Test Specification:**

Standard .....: EN 55014-1: 2017  
EN IEC 61000-3-2: 2019  
EN 61000-3-3: 2013+A1: 2019  
EN 55014-2: 2015

Test Report Form No. ....: LCSEMC-1.0

TRF Originator .....: Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF .....: Dated 2011-03

**SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. is acknowledged as copyright owner and source of the material. SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description.....: Multi-function charger**

Trade Mark.....: QUAWINTEC

Test Model .....: QW050-020-4NL

Ratings.....: Input: DC 5V, 2000mA, 10W  
Output: DC 4.2V, 2000mA, 9W  
DC 1.5V, 2000mA, 3W

**Result .....: Positive**

**Compiled by:**

*Cindy Nie*

Cindy Nie/ File administrators

**Supervised by:**

*Tom Wang*

Tom Wang/ Technique principal



Gavin Liang/ Manager



### Revision History

Revision	Issue Date	Revisions	Revised By
000	April 21, 2021	Initial Issue	Gavin Liang

## TABLE OF CONTENT

Test Report Description	Page
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>6</b>
1.1. Description of Standards and Results .....	6
1.2. Description of Performance Criteria .....	7
<b>2. GENERAL INFORMATION .....</b>	<b>8</b>
2.1. Description of Device (EUT) .....	8
2.2. Test Facility .....	8
2.3. Statement of the Measurement Uncertainty .....	8
2.4. Measurement Uncertainty .....	9
<b>3. MEASURING DEVICES AND TEST EQUIPMENT .....</b>	<b>10</b>
<b>4. TEST RESULTS .....</b>	<b>12</b>
4.1. Power Line Conducted Emission Measurement .....	12
4.2. Disturbance Power Measurement .....	14
4.3. Harmonic Current Emission Measurement .....	16
4.4. Voltage Fluctuation And Flicker Measurement .....	17
4.5. Electrostatic Discharge Immunity Test .....	18
4.6. Electrical Fast Transient/Burst Immunity Test .....	20
4.7. Surge Immunity Test .....	22
4.8. Injected Currents Susceptibility Test .....	24
4.9. Voltage Dips And Interruptions Test .....	26
<b>ANNEX A.....</b>	<b>28</b>
<b>ANNEX B.....</b>	<b>32</b>
<b>ANNEX C.....</b>	<b>42</b>

# 1. SUMMARY OF STANDARDS AND RESULTS

## 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION (EN 55014-1: 2017)			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	EN 55014-1: 2017	-----	PASS
Disturbance Power	EN 55014-1: 2017	-----	PASS
Radiated disturbance	EN 55014-1: 2017	-----	N/A
Harmonic current emissions	EN IEC 61000-3-2: 2019	Class A	PASS
Voltage fluctuations & flicker	EN 61000-3-3: 2013+A1: 2019	-----	PASS
IMMUNITY (EN 55014-2: 2015)			
Description of Test Item	Basic Standard	Performance Criteria	Results
Electrostatic discharge (ESD)	EN 61000-4-2: 2009	B	PASS
Radio-frequency, Continuous radiated disturbance	EN 61000-4-3: 2006+A2: 2010	A	N/A
Electrical fast transient (EFT)	EN 61000-4-4: 2012	B	PASS
Surge (Input a.c. power ports)	EN 61000-4-5: 2014+A1: 2017	B	PASS
Radio-frequency, Continuous conducted disturbance	EN 61000-4-6: 2014	A	PASS
Power frequency magnetic field	EN 61000-4-8: 2010	A	N/A
Voltage dips, 60% reduction	EN 61000-4-11: 2004+A1: 2017	C	PASS
Voltage dips, 30% reduction		C	PASS
Voltage interruptions		C	PASS
N/A is an abbreviation for Not Applicable.			

Test mode:		
Mode 1	Charging	Record
***Note: All test modes were tested, but we only recorded the worst case in this report.		

## 1.2. Description of Performance Criteria

### General Performance Criteria

Examples of functions defined by the manufacturer to be evaluated during testing include, but are not limited to, the following:

- essential operational modes and states;
- tests of all peripheral access (hard disks, floppy disks, printers, keyboard, mouse, etc.);
- quality of software execution;
- quality of data display and transmission;
- quality of speech transmission.

#### 1.2.1. Performance criterion A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacture when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be deliver from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

#### 1.2.2. Performance criterion B

After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacture, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operation state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be deliver from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

#### 1.2.3. Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacture's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be loss.

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT : Multi-function charger

Trade Mark : QUAWINTEC

Test Model : QW050-020-4NL

Power Supply : Input: DC 5V, 2000mA, 10W  
Output: DC 4.2V, 2000mA, 9W  
DC 1.5V, 2000mA, 3W

EUT Clock Frequency : ≤15MHz

### 2.2. Test Facility

EMC Lab. : NVLAP Accreditation Code is 600167-0.  
FCC Designation Number is CN5024.  
CAB identifier is CN0071.  
CNAS Registration Number is L4595.

### 2.3. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.



## 2.4.Measurement Uncertainty

Test	Parameters	Expanded uncertainty (U <sub>lab</sub> )	Expanded uncertainty (U <sub>cispr</sub> )
Conducted Emission	Level accuracy (9kHz to 150kHz)	± 2.63 dB	± 3.8 dB
	(150kHz to 30MHz)	± 2.35 dB	± 3.4 dB
Power Disturbance	Level accuracy (30MHz to 300MHz)	± 2.90dB	± 4.5 dB
Electromagnetic Radiated Emission (3-loop)	Level accuracy (9kHz to 30MHz)	± 3.60 dB	± 3.3 dB
Radiated Emission	Level accuracy (9kHz to 30MHz)	± 3.68 dB	N/A
Radiated Emission	Level accuracy (30MHz to 1000MHz)	± 3.48 dB	± 5.3 dB
Radiated Emission	Level accuracy (above 1000MHz)	± 3.90 dB	± 5.2 dB
Mains Harmonic	Voltage	± 0.510%	N/A
Voltage Fluctuations & Flicker	Voltage	± 0.510%	N/A

- (1) Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.
- (2) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

### 3. MEASURING DEVICES AND TEST EQUIPMENT

3.1. Conducted Disturbance						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
1	EMI Test Software	EZ	EZ-EMC	/	N/A	N/A
2	EMI Test Receiver	R&S	ESPI	101840	2020-06-22	2021-06-21
3	Artificial Mains	R&S	ENV216	101288	2020-06-22	2021-06-21
4	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-003 2	2020-06-22	2021-06-21
5	Impedance Stabilization Network	TESEQ	ISN T800	45130	2020-12-02	2021-12-01
3.2. Disturbance Power						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
1	EMI Test Software	EZ	EZ-EMC	/	N/A	N/A
2	EMI Test Receiver	R&S	ESPI	101840	2020-06-22	2021-06-21
3	Absorbing clamp	R&S	MDS 21	4033	2020-07-22	2021-07-21
4	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-003 2	2020-06-22	2021-06-21
3.3. Harmonic Current						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2020-06-22	2021-06-21
3.4. Voltage fluctuation and Flicker						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
1	Power Analyzer Test System	Voltech	PM6000	20000670053	2020-06-22	2021-06-21
3.5. Electrostatic Discharge						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
1	ESD Simulator	SCHLODER	SESD 230	604035	2020-07-21	2021-07-20
3.6. Electrical Fast Transient/Burst						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
1	Immunity Simulative Generator	EM TEST	UCS500 M4	0101-34	2020-06-22	2021-06-21
3.7. Surge						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
1	Immunity Simulative Generator	EM test	UCS500 M4	0101-34	2020-06-22	2021-06-21
3.8. Conducted Susceptibility						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
1	Simulator	FRANKONIA	CIT-10/75	A126A1195	2020-06-22	2021-06-21
2	CDN	FRANKONIA	CDN-M2+M3	A2210177	2020-06-22	2021-06-21
3	6dB Attenuator	FRANKONIA	DAM25W	1172040	2020-06-22	2021-06-21

## 3.9.Voltage Dips

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2020-06-22	2021-06-21


## 3.10.Voltage Short Interruptions

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
1	Voltage dips and up generator	3CTEST	VDG-1105G	EC0171014	2020-06-22	2021-06-21

## 4. TEST RESULTS

### 4.1. Power Line Conducted Emission Measurement

#### 4.1.1. Block Diagram of Test Setup

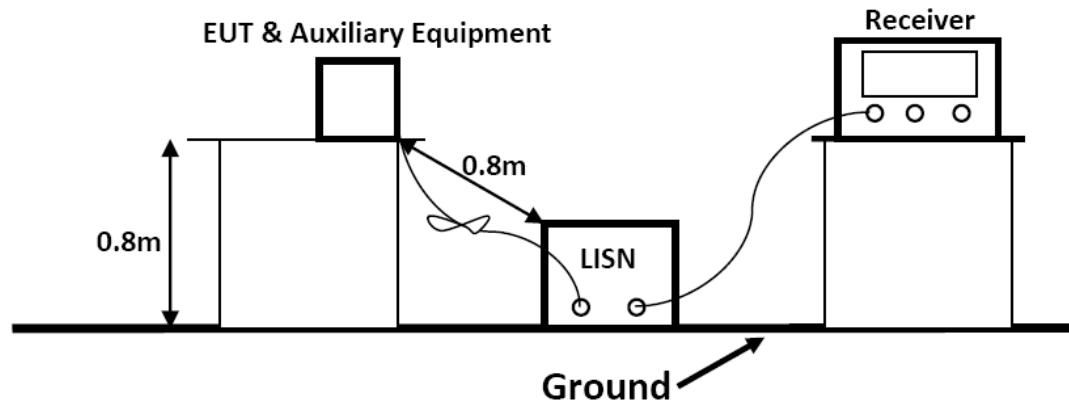

#### 4.1.2. Power Line Conducted Emission Limits

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	59.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

Remark: \* means decreasing linearly with logarithm of frequency.

#### 4.1.3. EUT Configuration on Test

The following equipments are installed on Conducted Emission Measurement to meet EN 55014–1 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

#### 4.1.4. Operating Condition of EUT

4.1.4.1. Setup the EUT as shown on Section 4.1.1.

4.1.4.2. Turn on the power of all equipments.

4.1.4.3. Let the EUT work in measuring Mode 1 and measure it.

#### 4.1.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through a Line Impedance Stability Network (L.I.S.N). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN 55014-1 regulations during conducted emission measurement.

The bandwidth of the field strength meter is set at 9kHz.

The frequency range from 150kHz to 30MHz is investigated. The scanning waveform please refer to the next page.


#### 4.1.6. Test Results

**PASS.**

Refer to attached Annex B.1

## 4.2. Disturbance Power Measurement

### 4.2.1. Block Diagram of Test Setup

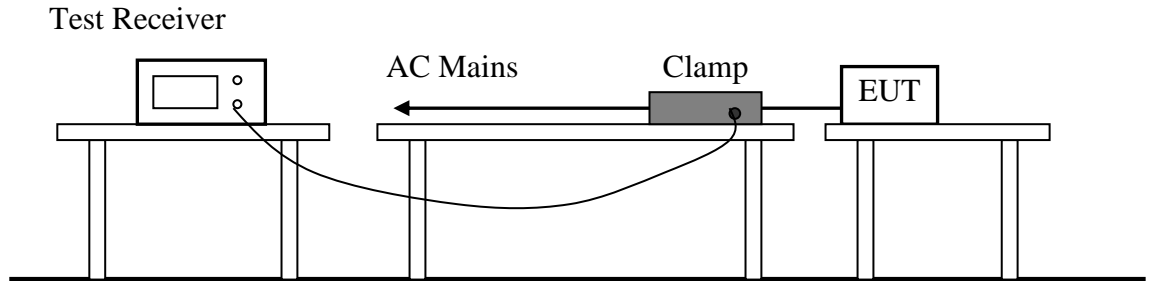

### 4.2.2. Test Standard

EN 55014-1: 2017

### 4.2.3. Disturbance Power Limits

All emanations from devices or system including any network of conductors and apparatus connected there to, shall not exceed the level of field strengths specified below:

Frequency MHz	Limits dB(pW)	
	Quasi-peak Value	Average Value
30 ~ 300	45 Increasing Linearly with Frequency to 55	35 Increasing Linearly with Frequency to 45

1	Household and similar appliances		Tools					
	2	3	4	5	6	7	8	9
Frequency range			Rated motor power not exceeding 700 W		Rated motor power above 700 W and not exceeding 1000 W		Rated motor power above 1000 W	
(MHz)	dB (pW) Quasi-peak	dB (pW) Average	dB (pW) Quasi-peak	dB (pW) Average	dB (pW) Quasi-peak	dB (pW) Average	dB (pW) Quasi-peak	dB (pW) Average
Increasing linearly with the frequency from:								
200 to 300	0 to 10 dB	-	0 to 10 dB	-	0 to 10 dB	-	0 to 10 dB	-
NOTE 1 This table only applies if specified in 4.1.2.3.2.								
NOTE 2 The measured result at a particular frequency shall be less than the relevant limit minus the corresponding margin (at that frequency).								

#### 4.2.4.EUT Configuration on Test

The EN 55014-1 Regulations test method must be used to find the maximum emission during radiated emission measurement. The configuration of the EUT is the same as used in conducted emission measurement.

#### 4.2.5.Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 4.1.1 except the test set up replaced as Section 4.2.1.

#### 4.2.6.Test Procedure

The EUT is placed on the plane 0.8m high above the ground by insulating support and away from other metallic surface at least 0.4m. It is connected to the power mains through an extension cord of 6m min. The absorber clamp clamps the cord and moves from the far end to the EUT to measure the disturbing energy emitted from the cord.


The bandwidth of the field strength meter is set at 120kHz.  
All the test results are listed in Section 4.2.7.

#### 4.2.7.Test Results

PASS.  
Refer to attached Annex B.2

### 4.3. Harmonic Current Emission Measurement

#### 4.3.1. Block Diagram of Test Setup

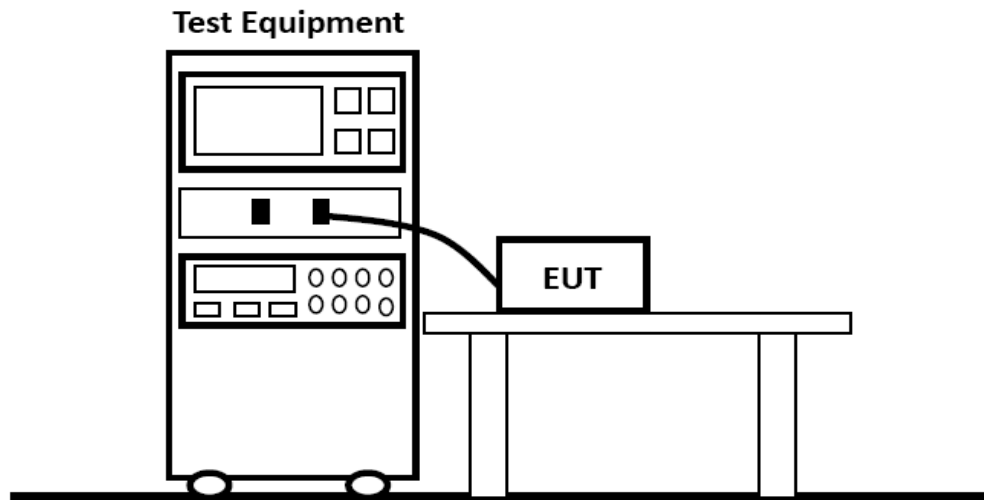

#### 4.3.2. Test Standard

EN IEC 61000-3-2: 2019, Class A

#### 4.3.3. Operation Condition of EUT

Same as Section 4.1.4 except the test setup replaced as Section 4.3.1.

#### 4.3.4. Test Results


**Pass.**

Refer to attached Annex B.3



## 4.4. Voltage Fluctuation And Flicker Measurement

### 4.4.1. Block Diagram of Test Setup

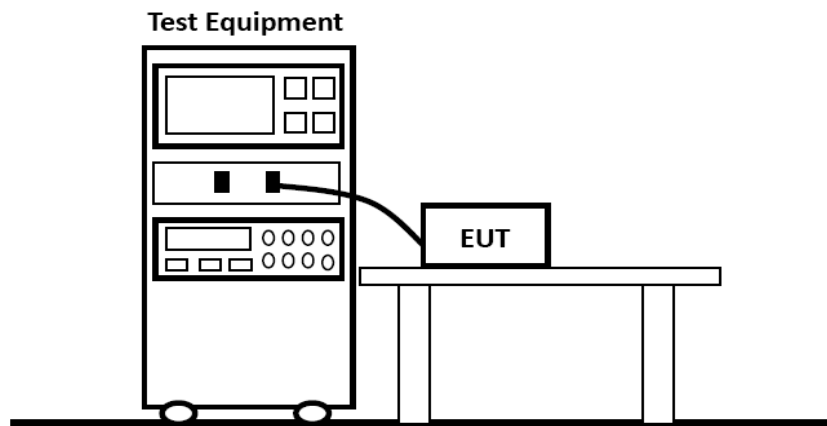

### 4.4.2. Test Standard

EN 61000-3-3: 2013+A1: 2019

### 4.4.3. Operation Condition of EUT

4.4.3.1. Setup the EUT as shown Section 4.4.1.

4.4.3.2. Turn on the power of all equipments.

4.4.3.3. Let EUT work in test mode (On/Off) and measure it.


### 4.4.4. Test Results

**PASS.**

Refer to attached Annex B.4

### 4.5. Electrostatic Discharge Immunity Test

#### 4.5.1. Block Diagram of Test Setup

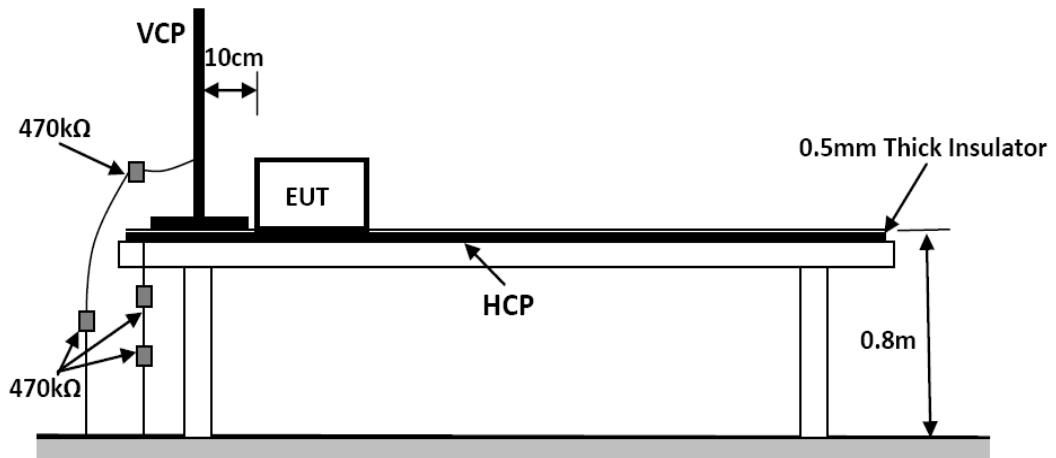

#### 4.5.2. Test Standard

EN 55014-2: 2015(EN 61000-4-2: 2009, Severity Level: 3 / Air Discharge: ±8KV; Level: 2 / Contact Discharge: ±4KV)

#### 4.5.3. Severity Levels and Performance Criterion

##### 4.5.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	±2	±2
2.	±4	±4
3.	±6	±8
4.	±8	±15
X	Special	Special

##### 4.5.3.2. Performance criterion: **B**

#### 4.5.4. EUT Configuration on Test

The configuration of EUT are listed in Section 4.5.1.

#### 4.5.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 4.1.4, except the test set up replaced by Section 4.5.1.

#### 4.5.6. Test Procedure

##### 4.6.6.1. Air Discharge

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

##### 4.5.6.2. Contact Discharge

All the procedure shall be same as Section 4.5.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

##### 4.5.6.3. Indirect Discharge For Horizontal Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

##### 4.5.6.4. Indirect Discharge For Vertical Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.


#### 4.5.7. Test Results

**PASS.**

Refer to attached Annex B.5

## 4.6. Electrical Fast Transient/Burst Immunity Test

### 4.6.1. Block Diagram of Test Setup

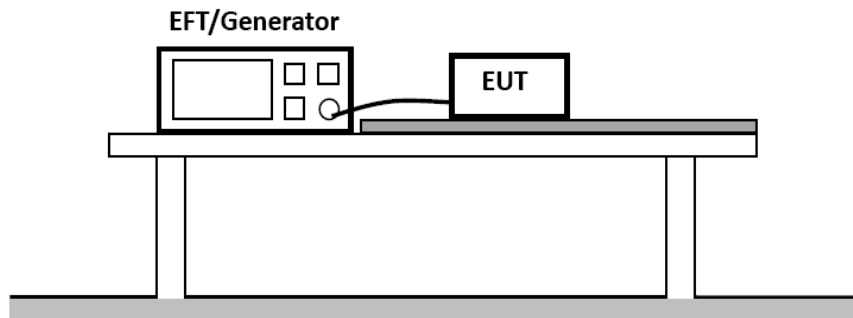

### 4.6.2. Test Standard

EN 55014-2: 2015 (EN 61000-4-4: 2012, Severity Level: Level 2: 1KV)

### 4.6.3. Severity Levels and Performance Criterion

#### 4.7.3.1. Severity level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.50KV	0.25KV
2.	1.00KV	0.50KV
3.	2.00KV	1.00KV
4.	4.00KV	2.00KV
X	Special	Special

#### 4.6.3.2. Performance criterion: **B**

### 4.6.4. EUT Configuration on Test

The configuration of EUT are listed in Section 4.6.1.

### 4.6.5. Operating Condition of EUT

4.6.5.1. Setup the EUT as shown in Section 4.6.1.

4.6.5.2. Turn on the power of all equipments.

4.6.5.3. Let the EUT work in test Mode 1 and measure it.

#### 4.6.6. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

##### 4.6.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

##### 4.6.6.2. For signal lines and control lines ports:

No I/O ports. It's unnecessary to test.

##### 4.6.6.3. For DC output line ports:

No DC output ports. It's unnecessary to test.


#### 4.6.7. Test Results

**PASS.**

Refer to attached Annex B.6

## 4.7. Surge Immunity Test

### 4.7.1. Block Diagram of Test Setup

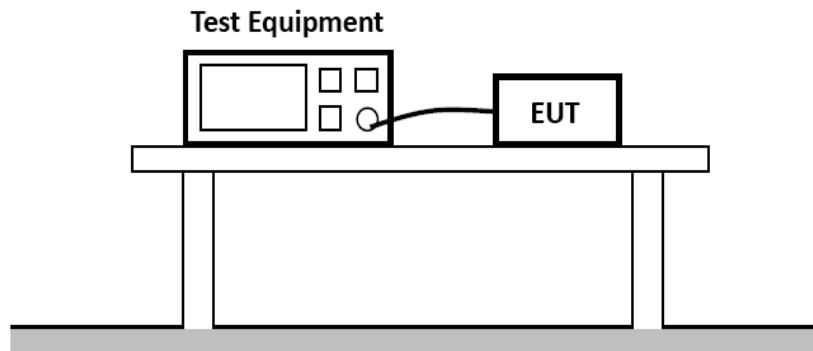

### 4.7.2. Test Standard

EN 55014-2: 2015

(EN 61000-4-5: 2014+A1: 2017, Severity Level: Level 2, Line to Line: 1.0KV; Level 3: Line to Ground: 2.0KV)

### 4.7.3. Severity Levels and Performance Criterion

#### 4.8.3.1. Severity level

Severity Level	Open-Circuit Test Voltage (KV)
1	0.5
2	1.0
3	2.0
4	4.0
X	Special

#### 4.7.3.2. Performance criterion: **B**

### 4.7.4. EUT Configuration on Test

The configuration of EUT are listed in Section 4.7.1.

### 4.7.5. Operating Condition of EUT

4.7.5.1. Setup the EUT as shown in Section 4.7.1.

4.7.5.2. Turn on the power of all equipments.

4.7.5.3. Let the EUT work in test Mode 1 and measure it.

#### 4.7.6. Test Procedure

4.7.6.1. Set up the EUT and test generator as shown on Section 4.7.1.

4.7.6.2. For line to line coupling mode, provide a 1.0 KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.

4.7.6.3. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test

4.7.6.4. Different phase angles are done individually.

4.7.6.5. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.


#### 4.7.7. Test Results

**PASS.**

Refer to attached Annex B.7

## 4.8. Injected Currents Susceptibility Test

### 4.8.1. Block Diagram of Test Setup

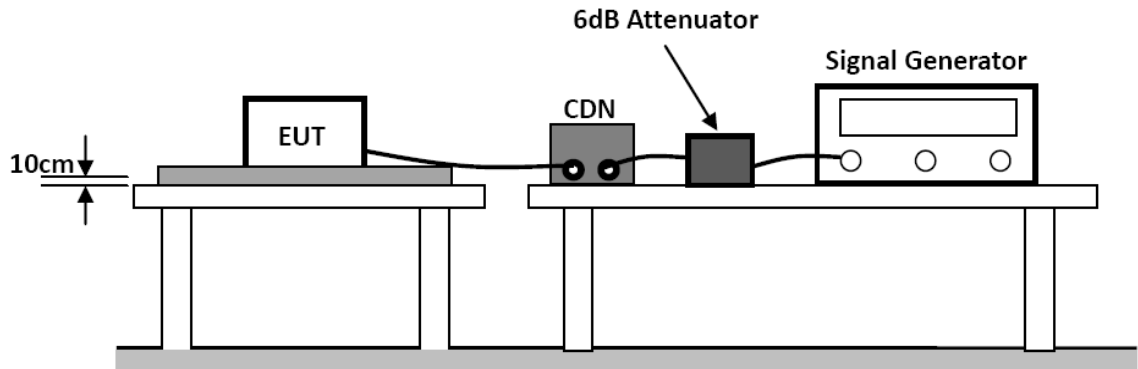

### 4.8.2. Test Standard

EN 55014-2: 2015(EN 61000-4-6: 2014, Severity Level: 3V (rms), (0.15MHz ~ 230MHz))

### 4.8.3. Severity Levels and Performance Criterion

#### 4.8.3.1. Severity level

Level	Field Strength (V)
1	1
2	3
3	10
X	Special

#### 4.8.3.2. Performance criterion: **A**

### 4.8.4. EUT Configuration on Test

The configuration of EUT are listed in Section 4.8.1.

### 4.8.5. Operating Condition of EUT

4.8.5.1. Setup the EUT as shown in Section 4.8.1.

4.8.5.2. Turn on the power of all equipments.

4.8.5.3. Let the EUT work in test Mode 1 and measure it.



#### 4.8.6. Test Procedure

4.8.6.1. Set up the EUT, CDN and test generators as shown on Section 4.8.1.

4.8.6.2. Let the EUT work in test mode and measure it.

4.8.6.3. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).

4.8.6.4. The disturbance signal described below is injected to EUT through CDN.

4.8.6.5. The EUT operates within its operational mode(s) under intended climatic conditions after power on.

4.8.6.6. The frequency range is swept from 150kHz to 230MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.

4.8.6.7. The rate of sweep shall not exceed  $1.5 \times 10^{-3}$  decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

4.8.6.8. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.


#### 4.8.7. Test Results

**PASS.**

Refer to attached Annex B.8

## 4.9. Voltage Dips And Interruptions Test

### 4.9.1. Block Diagram of Test Setup

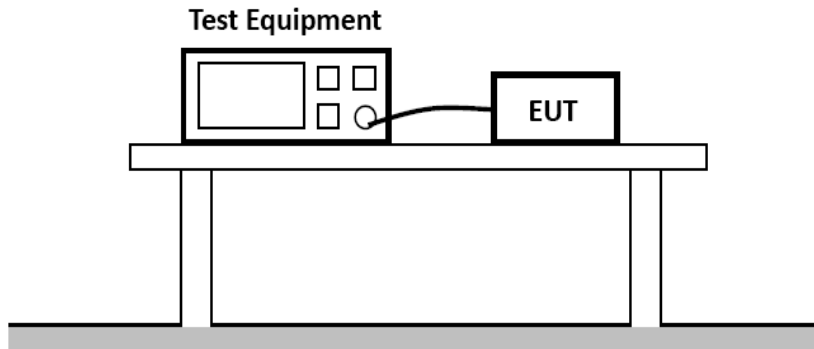

### 4.9.2. Test Standard

EN 55014-2: 2015 (EN 61000-4-11: 2004+A1: 2017)

### 4.9.3. Severity Levels and Performance Criterion

#### 4.9.3.1. Severity level

Test Level (%U <sub>T</sub> )	Voltage dip and short interruptions (%U <sub>T</sub> )	Duration (in period)	
		0.5	0.6
0	100	10	12
40	60	25	60
70	30		

#### 4.9.3.2. Performance criterion: **C&C**

### 4.9.4. EUT Configuration on Test

The configuration of EUT are listed in Section 4.9.1.

### 4.9.5. Operating Condition of EUT

4.9.5.1. Setup the EUT as shown in Section 4.9.1.

4.9.5.2. Turn on the power of all equipments.

4.9.5.3. Let the EUT work in test Mode 1 and measure it.

#### 4.9.6. Test Procedure

4.9.6.1. Set up the EUT and test generator as shown on Section 4.9.1.

4.9.6.2. The interruptions is introduced at selected phase angles with specified duration.

4.9.6.3. Record any degradation of performance.

#### 4.9.7. Test Results

**PASS.**

Refer to attached Annex B.9

## ANNEX A

(Test photograph)


### A.1.Photo of Power Line Conducted Measurement




### A.2.Photo of Disturbance Power Test



### A.3.Photo of Harmonic & Flicker Measurement

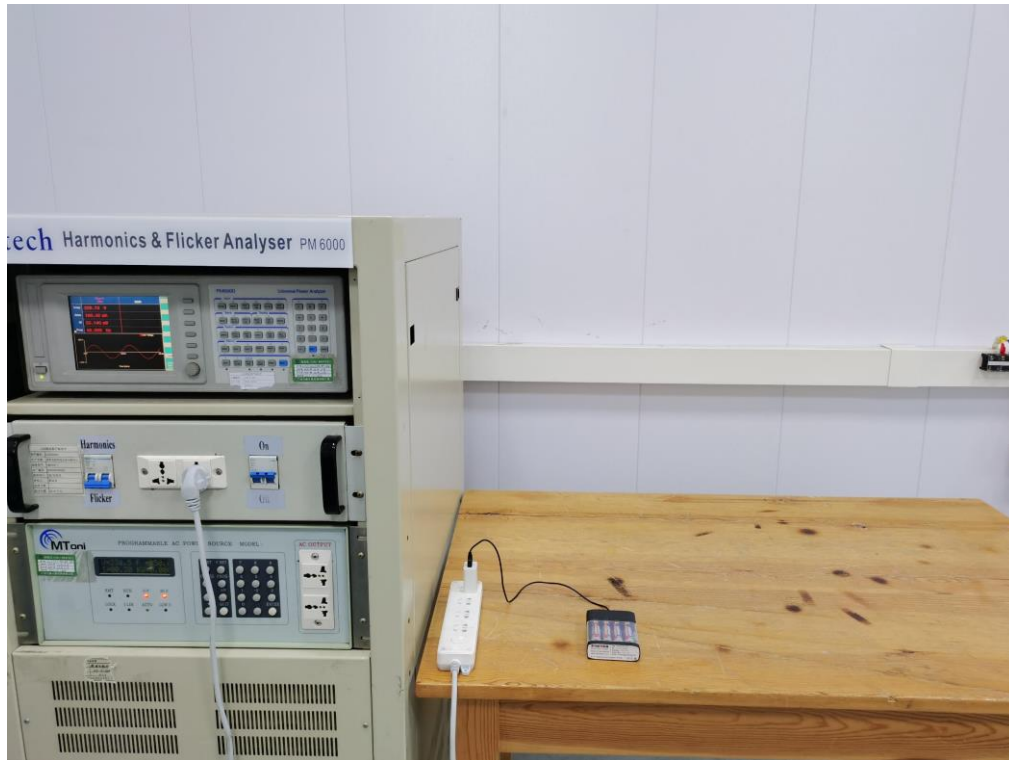

### A.4.Photo of Electrostatic Discharge Test

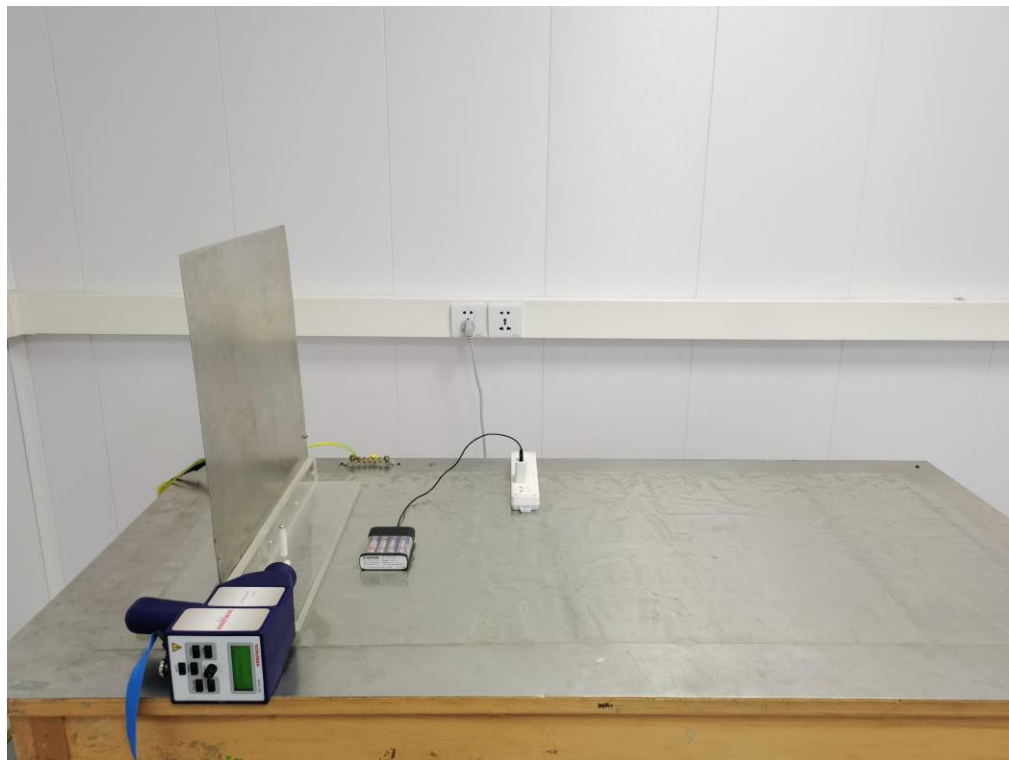


A.5. Photo of Electrical Fast Transient/Burst Test & Surge Immunity Test



A.6. Photo of Injected Currents Susceptibility Test



A.7.Photo of Voltage Dips and Interruptions Test

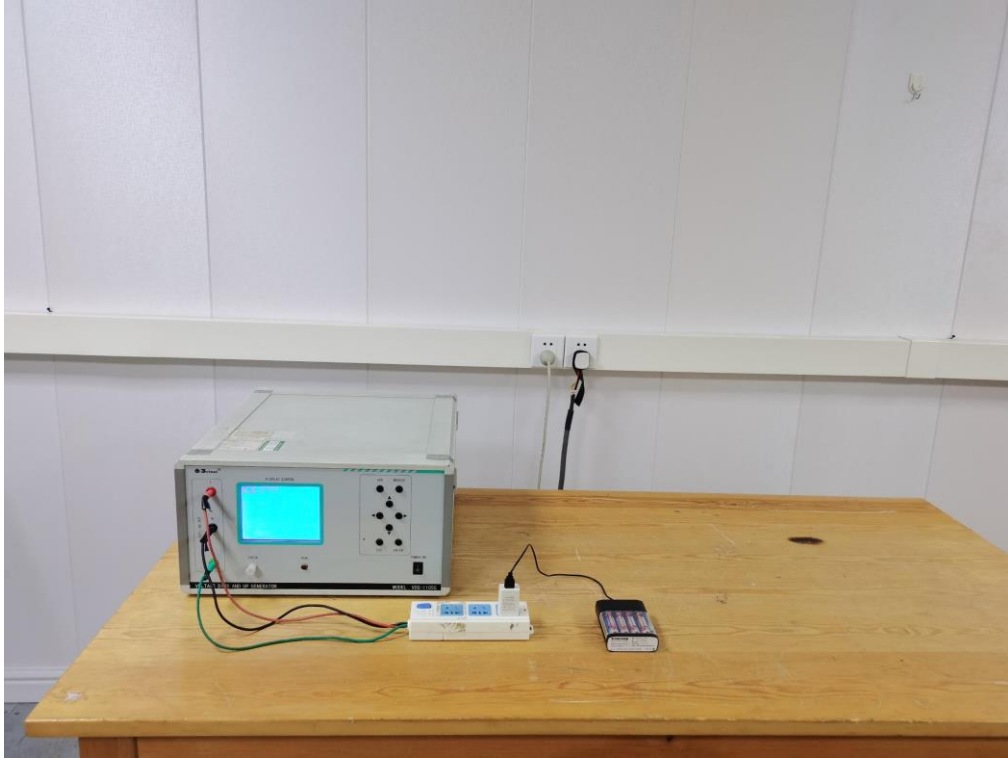


## ANNEX B

(Emission and Immunity test results)

### B.1 POWER LINE CONDUCTED EMISSION MEASUREMENT

Environmental Conditions:	23.3°C, 53.7% RH
Test Voltage:	AC 230V,50Hz
Test Model:	QW050-020-4NL
Test Mode:	Mode 1
Test Engineer:	ZQ Pang
Pol:	Line

Detailed results are shown below

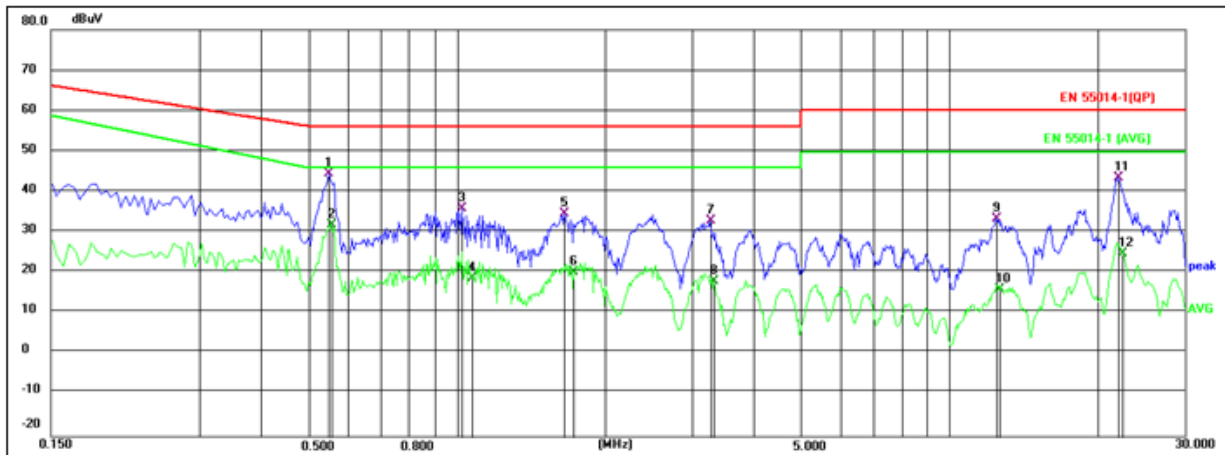


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5493	29.17	15.56	44.73	56.00	-11.27	QP
2	0.5552	16.55	15.55	32.10	46.00	-13.90	AVG
3	1.0265	20.91	15.09	36.00	56.00	-20.00	QP
4	1.0766	3.74	15.10	18.84	46.00	-27.16	AVG
5	1.6537	19.67	15.17	34.84	56.00	-21.16	QP
6	1.7253	5.34	15.17	20.51	46.00	-25.49	AVG
7	3.2583	20.02	12.96	32.98	56.00	-23.02	QP
8	3.3105	5.23	12.86	18.09	46.00	-27.91	AVG
9	12.3837	19.55	14.03	33.58	60.00	-26.42	QP
10	12.5821	2.49	13.73	16.22	50.00	-33.78	AVG
11	21.9463	34.62	9.00	43.62	60.00	-16.38	QP
12	22.4163	16.00	8.95	24.95	50.00	-25.05	AVG



Environmental Conditions:	23.3°C, 53.7% RH
Test Voltage:	AC 230V,50Hz
Test Model:	QW050-020-4NL
Test Mode:	Mode 1
Test Engineer:	ZQ Pang
Pol:	Neutral

Detailed results are shown below

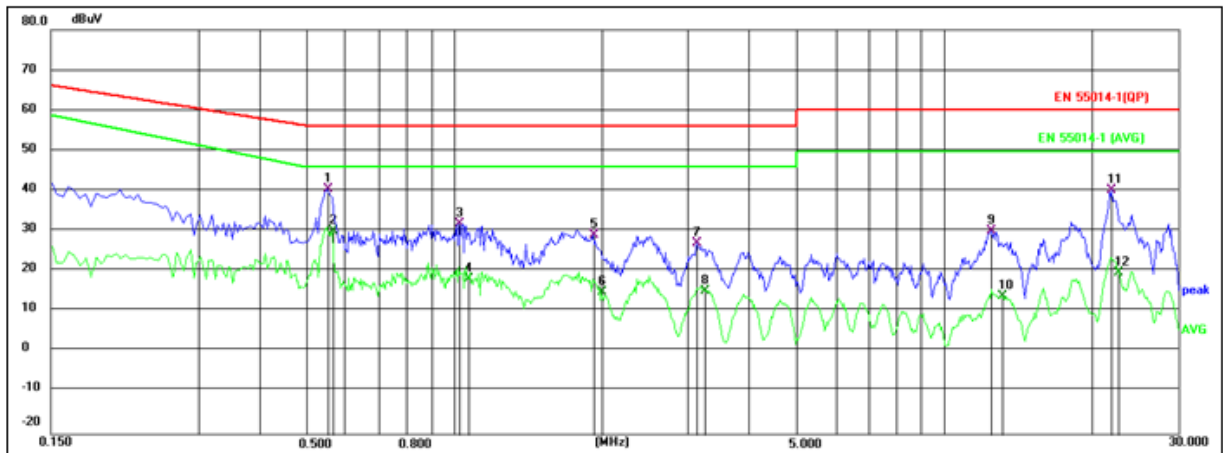


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5506	24.97	15.55	40.52	56.00	-15.48	QP
2	0.5641	14.62	15.53	30.15	46.00	-15.85	AVG
3	1.0231	17.02	15.08	32.10	56.00	-23.90	QP
4	1.0681	3.31	15.09	18.40	46.00	-27.60	AVG
5	1.9231	13.96	15.18	29.14	56.00	-26.86	QP
6	1.9951	0.04	15.19	15.23	46.00	-30.77	AVG
7	3.1381	13.97	13.16	27.13	56.00	-28.87	QP
8	3.2506	2.46	12.96	15.42	46.00	-30.58	AVG
9	12.4801	16.28	13.88	30.16	60.00	-29.84	QP
10	13.1326	1.21	12.90	14.11	50.00	-35.89	AVG
11	22.0516	31.46	8.76	40.22	60.00	-19.78	QP
12	22.7400	11.06	8.76	19.82	50.00	-30.18	AVG

### B.2 Disturbance Power Measurement

Environmental Conditions:	23.3°C, 53.7% RH
Test Voltage:	AC 230V,50Hz
Test Model:	QW050-020-4NL
Test Mode:	Mode 1
Test Engineer:	ZQ Pang

Detailed results are shown below

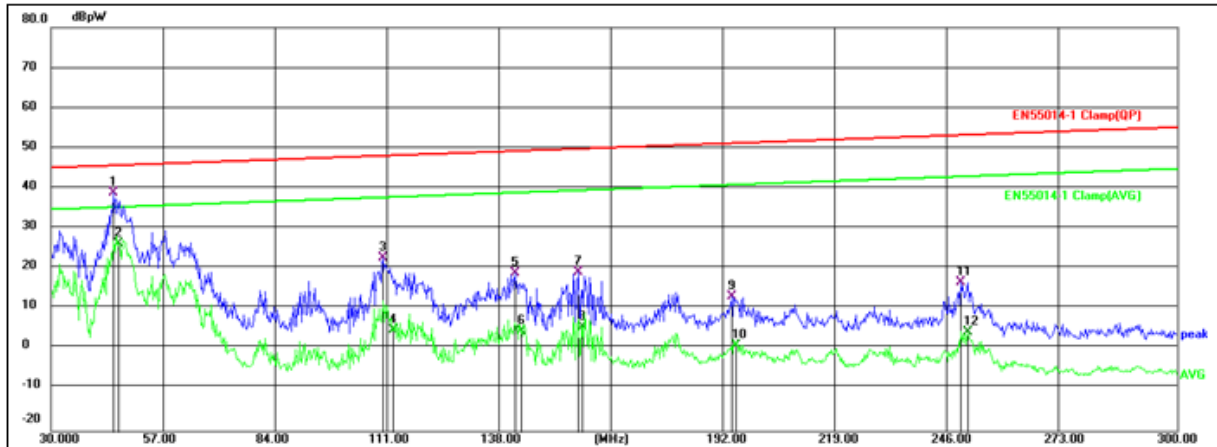

No.	Frequency (MHz)	Reading (dBpW)	Correct (dB)	Result (dBpW)	Limit (dBpW)	Margin (dB)	Remark
1	45.2400	28.31	10.80	39.11	45.56	-6.45	QP
2	46.3800	15.72	10.83	26.55	35.61	-9.06	AVG
3	109.8600	11.22	11.84	23.06	47.96	-24.90	QP
4	112.0800	-6.89	11.90	5.01	38.04	-33.03	AVG
5	141.4800	7.25	11.90	19.15	49.13	-29.98	QP
6	142.8600	-7.02	11.90	4.88	39.18	-34.30	AVG
7	156.5400	7.38	11.96	19.34	49.69	-30.35	QP
8	157.4400	-6.27	11.98	5.71	39.72	-34.01	AVG
9	193.3800	2.01	11.49	13.50	51.05	-37.55	QP
10	194.2800	-10.31	11.53	1.22	41.08	-39.86	AVG
11	248.2200	6.23	10.67	16.90	53.08	-36.18	QP
12	249.9000	-6.08	10.68	4.60	43.14	-38.54	AVG

### **B.3 Harmonic Current Emission Measurement**

Pass

Because the power of EUT is less than 75W, according to standard EN 61000-3-2, harmonic current unnecessary to test.

**B.4 Voltage Fluctuation And Flicker Measurement**

Test Voltage:	AC 230V,50Hz
Test Model:	QW050-020-4NL
Test Engineer:	ZQ Pang

Detailed results are shown below

Overall Result:  <b>PASS</b>	Notes: Measurement method - Voltage			
	Pst	dc (%)	dmax (%)	Tmax(> 3.3%)(ms)
Limit	1.000	3.300	4.000	500
Reading 1	0.090	0.008	0.275	0

**B.5 Electrostatic Discharge Immunity Test**

## Electrostatic Discharge Test Results

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-2 <input checked="" type="checkbox"/> EN 61000-4-2		
<b>Applicant</b>	QUAWINTEC TECHNOLOGY CO., LIMITED		
<b>EUT</b>	Multi-function charger	<b>Temperature</b>	22.9°C
<b>M/N</b>	QW050-020-4NL	<b>Humidity</b>	53.2%
<b>Criterion</b>	B	<b>Pressure</b>	1021mbar
<b>Test Mode</b>	Mode 1	<b>Test Engineer</b>	ZQ Pang
<b>Test Voltage</b>	AC 230V/50Hz		

### Air Discharge

Test Points	Test Levels			Results		
	± 2kV	± 4kV	± 8kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

### Contact Discharge

Test Points	Test Levels		Results		
	± 2 kV	±4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Top	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Bottom	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

### Discharge To Horizontal Coupling Plane

Side of EUT	Test Levels		Results		
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

### Discharge To Vertical Coupling Plane

Side of EUT	Test Levels		Results		
	± 2 kV	± 4 kV	Passed	Fail	Performance Criterion
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/> A <input checked="" type="checkbox"/> B

**B.6 Electrical Fast Transient/Burst Immunity Test****Electrical Fast Transient/Burst Test Results**

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-4 <input checked="" type="checkbox"/> EN 61000-4-4		
<b>Applicant</b>	QUAWINTEC TECHNOLOGY CO., LIMITED		
<b>EUT</b>	Multi-function charger	<b>Temperature</b>	23.6°C
<b>M/N</b>	QW050-020-4NL	<b>Humidity</b>	53.4%
<b>Test Mode</b>	Mode 1	<b>Criterion</b>	B
<b>Test Engineer</b>	ZQ Pang	<b>Test Voltage</b>	AC 230V/50Hz

Line	Test Voltage	Result (+)	Result (-)
L	1KV	PASS	PASS
N	1KV	PASS	PASS
PE			
L-N	1KV	PASS	PASS
L-PE			
N-PE			
L-N-PE			
Signal Line			
I/O Cable			

Note:

**B.7 Surge Immunity Test**

Surge Immunity Test Result			
<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-5 <input checked="" type="checkbox"/> EN 61000-4-5		
<b>Applicant</b>	QUAWINTEC TECHNOLOGY CO., LIMITED		
<b>EUT</b>	Multi-function charger	<b>Temperature</b>	23.6°C
<b>M/N</b>	QW050-020-4NL	<b>Humidity</b>	53.4%
<b>Test Mode</b>	Mode 1	<b>Criterion</b>	B
<b>Test Engineer</b>	ZQ Pang	<b>Test Voltage</b>	AC 230V/50Hz

Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Result
L-N	+	90°	5	1.0	PASS
	-	270°	5	1.0	PASS
L-PE					
N-PE					
Signal Line					
Note					

**B.8 Injected Currents Susceptibility Test****Injected Currents Susceptibility Test Results**

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-6 <input checked="" type="checkbox"/> EN 61000-4-6		
<b>Applicant</b>	QUAWINTEC TECHNOLOGY CO., LIMITED		
<b>EUT</b>	Multi-function charger	<b>Temperature</b>	23.9℃
<b>M/N</b>	QW050-020-4NL	<b>Humidity</b>	52.8%
<b>Test Mode</b>	Mode 1	<b>Criterion</b>	A
<b>Test Engineer</b>	ZQ Pang	<b>Test Voltage</b>	AC 230V/50Hz

Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Criterion	Result
0.15 ~ 230	AC Mains	3V	A	PASS

## Remark:

1. Modulation Signal: 1kHz 80% AM

2. Measurement Equipment :

Simulator: CIT-10 (FRANKONIA)

    CDN :  CDN-M2 (SWITZERLAND EMTEST)     CDN-M3 (SWITZERLAND EMTEST)

## Note:



**B.9 Voltage Dips And Interruptions Test****Voltage Dips And Interruptions Test Results**

<b>Standard</b>	<input type="checkbox"/> IEC 61000-4-11 <input checked="" type="checkbox"/> EN 61000-4-11		
<b>Applicant</b>	QUAWINTEC TECHNOLOGY CO., LIMITED		
<b>EUT</b>	Multi-function charger	<b>Temperature</b>	22.5°C
<b>M/N</b>	QW050-020-4NL	<b>Humidity</b>	53.1%
<b>Test Mode</b>	Mode 1	<b>Criterion</b>	C&C
<b>Test Engineer</b>	ZQ Pang	<b>Test Voltage</b>	AC 230V/50Hz

Test Level % U <sub>T</sub>	Voltage Dips & Short Interruptions % U <sub>T</sub>	Duration (in periods)		Criterion	Result
		50Hz	60Hz		
40	60	10P	12P	C	PASS
70	30	25P	60P	C	PASS
0	100	0.5P	0.6P	C	PASS

Note:

## ANNEX C

( External and internal photos of the EUT )



Fig. 1

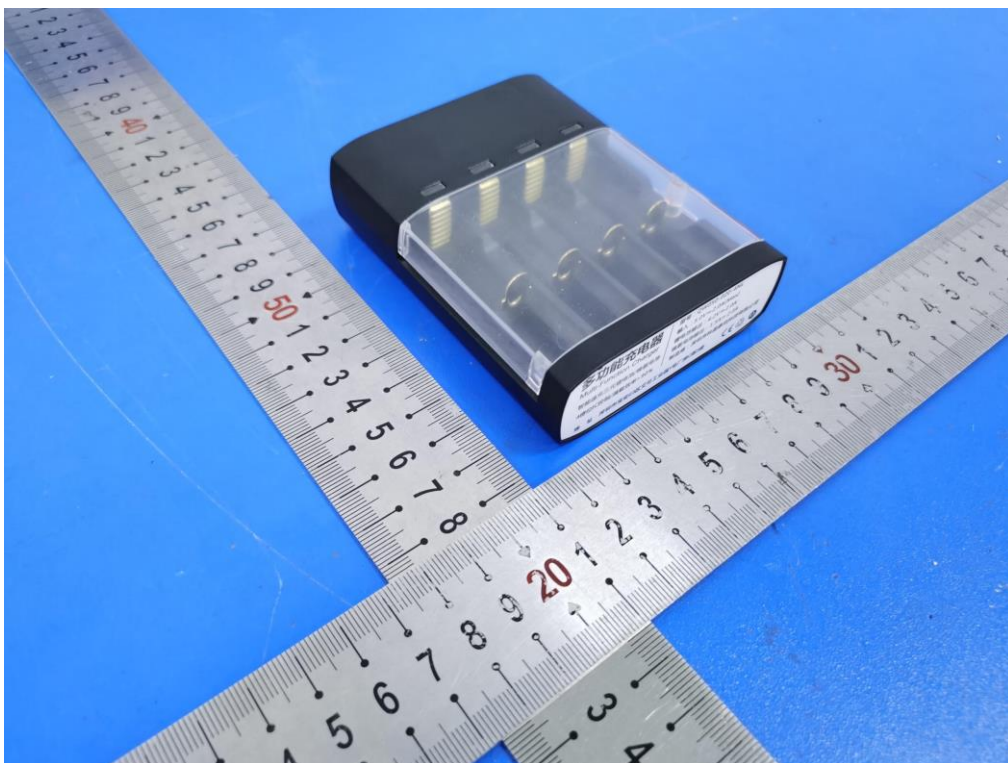


Fig. 2



Fig. 3

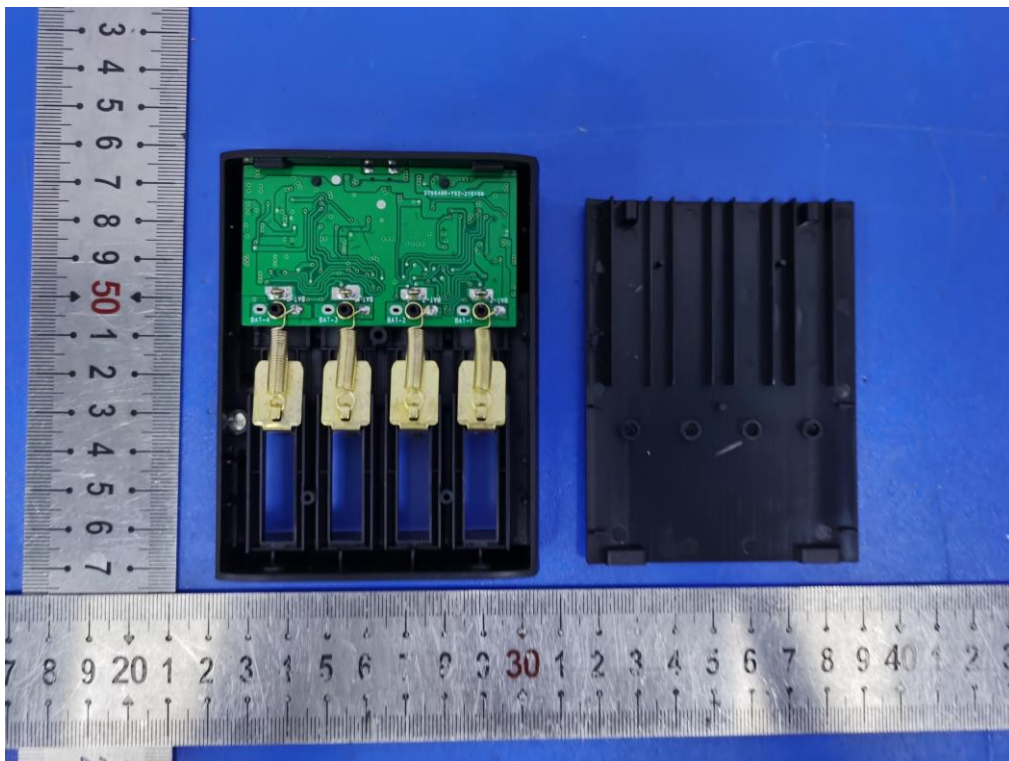


Fig. 4

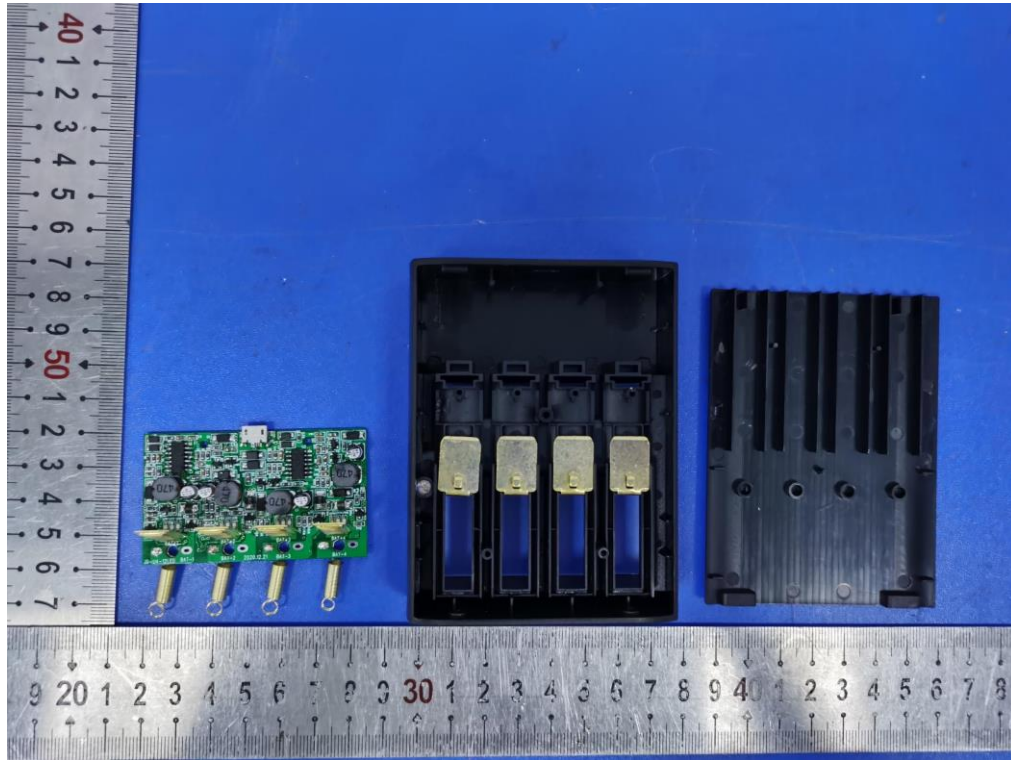


Fig. 5

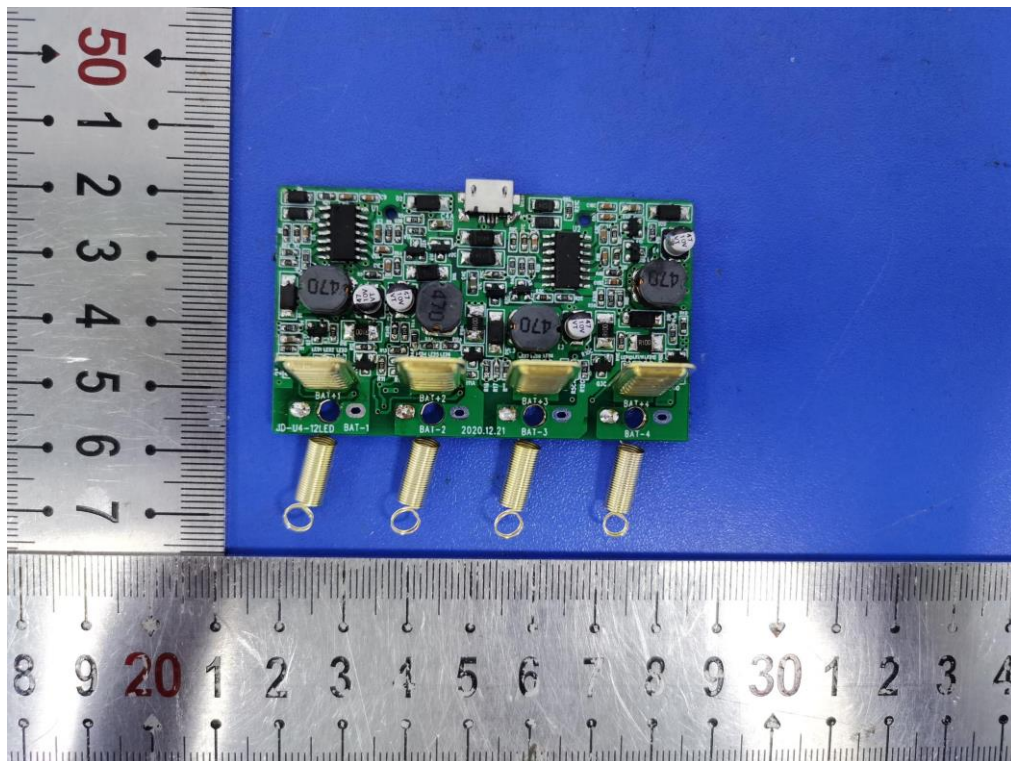


Fig. 6

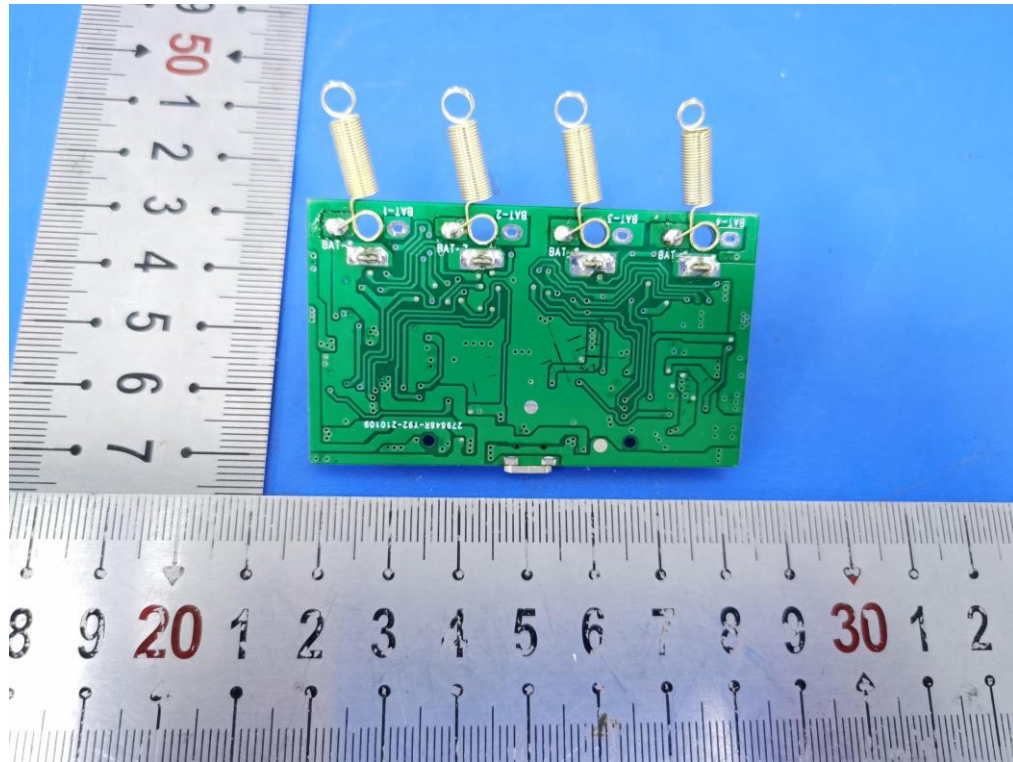


Fig. 7

-----THE END OF TEST REPORT-----